




# NOEPOX

## CLEANER FOR THE REMOVAL OF EPOXY GROUT RESIDUES

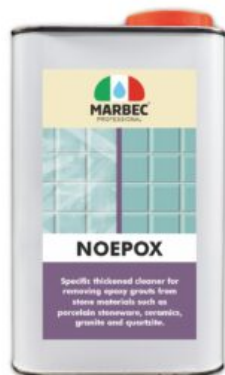

### User guide

#### DESCRIPTION:

Thickened mixture of organic solvents. Contains no CFC.

#### FIELDS OF APPLICATION:

On all surfaces in porcelain tiles, glazed ceramics, glass mosaics. Can be used for cleaning compact stone materials (e.g. granites, quartzites, etc.). Can be used both indoors and outdoors.

#### CHARACTERISTICS:

**NOEPOX** is a specific solvent cleaner for the removal of epoxy grouts from stone materials.

#### **NOEPOX:**

- eliminates the hardened residues of the epoxy grouts on the tile surface, without causing corrosion or discoloration of the already hardened plaster by the joint;
- is neither alkaline nor acid, therefore can be used safely even in the presence of stone surfaces;
- can be applied on all stone materials such as cotto, stone, glazed ceramics, klinker, porcelain tiles, cement, grits, etc. and also on wood, glass, metals and plastic;
- thanks to its viscosity, can be easily used on vertical surfaces.

#### INSTRUCTIONS FOR USE:

- It is used pure;
- Wait at least 24 hours after grouting before using NOEPOX;
- Always apply on dry surface;
- Spread the product with a brush on the surface to be cleaned;
- Proceed a few square meters at a time;
- Leave to act for about 30-60 minutes on the dried residues of plaster, 2-4 hours or more on the hardened residues of plaster;
- Then rinse with water (preferably with 1:10 UNIPUL aqueous detergent solution) rubbing the surface with a nylon brush or brown buffer proceeding diagonally with respect to the joints. On large surfaces and floors it is possible to intervene with a monobrush equipped with a brown disc;
- Finally rinse again with water.

#### PRECAUTIONS:

- do not use on synthetic polymers (e.g. synthetic agglomerates, methacrylate) and wood;
- avoid contact with plastic surfaces, paints and varnishes. On metal surfaces check their suitability.

#### NOTES:

Our indications are based on the current knowledge of the research and are intended to give the best guidance to the buyer-user. However, such indications require preliminary examination and testing of the fields of use, the types of materials present and the various conditions of application. The user decides independently on the suitability and the field of use. MARBEC Srl assumes no responsibility for the incorrect use of its products. Rev4-Ver110222

#### WARNINGS:



#### **WARNINGS: DANGER**

**Hazard statements:** Causes serious eye irritation.

**Precautionary statements:** Wear eye protection / face protection. – If eye irritation persists: Get medical advice / attention. -Keep cool. – IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

UFI: F610-105N-C00G-XWYK

Rev4-Ver110222

#### PACKAGING:

- 1 lt conf. Can – box 6 pcs.

#### YIELD:

- to remove the dried residues (after about 1-2 days.) 1lt / 15-20 m2;
- to remove the hardened residues (after 2-3 days.) 1lt / 10-15 m2.

#### TECHNICAL DATA:

- Physical state: colorless dense liquid
- Specific gravity (g/cm3) at 20°C: 1.09
- pH: n.a.
- Flame point (ASTM): > 90°C
- Solubility in water: insoluble in water.

#### STORAGE:

Keep the product tightly closed and at a temperature between 5 and 30 °C and not exposed to sunlight for a long time. STORAGE PERIOD: 5 years.

MARBEC SRL

Via Croce Rossa 51  
51037 - Montale PT  
Italia

CUSTOMER SERVICE

Tel +39 0573959848  
Whatsapp +39 3348578502  
Email [contatti@marbec.it](mailto:contatti@marbec.it)