




STRIP RESIL

UNIVERSAL DEWAXING DETERGENT

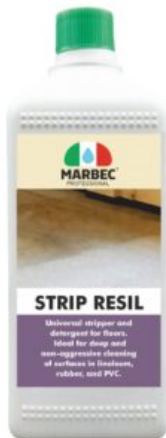

User guide

DESCRIPTION:

Alkaline solvent-based water solution containing solvents, amines, low-foaming surfactants, and sequestering agents. Does not contain caustic soda or ammonia.

FIELDS OF APPLICATION:

For strong stripping/cleansing wash of resilient materials such as linoleum, rubber, PVC, and stone materials.

CHARACTERISTICS:

STRIP RESIL is an alkaline solvent detergent for deep cleaning of resilient materials such as linoleum, rubber, and PVC.

STRIP RESIL:

- is a rapid-action stripping agent specifically designed to remove old layers of metallic wax and various polymers from resilient materials, without damaging the material;
- it can also be used as a stripping agent on stone materials;
- even at low concentrations, it possesses an effective film-forming action that can be easily adjusted by diluting it in water;
- it does not contain inorganic alkalis. It has low foaming effect and does not release unpleasant odors during use.

INSTRUCTIONS FOR USE:

INSTRUCTIONS FOR USE:

It can be used undiluted or diluted in water.

- Undiluted: for substantial buildup of wax and polymers;
- Diluted 100-250ml of **STRIP RESIL** in 1 liter of water: for washes requiring normal stripping action;
- Diluted 50-80ml of **STRIP RESIL** in 1 liter of water: for periodic washes with floor scrubbing machines.

How to use:

- Apply the product generously wetting the surface and let it sit for 10-15 minutes;
- Work in small areas (10-15 sq. meters). Scrub the surface with **red pads** or **discs**;
- Remove the stripping residues and pass with a clean mop;
- Rinsing is not necessary;
- Do not let dry the old layers of wax dissolved by the stripping agent on the surface.

Yield:

depending on the dirt to be removed and the cleaning technique:

- For vigorous washes: 1 liter / 4 – 8 sq. meters;
- For normal washes: 1 liter / 10 – 15 sq. meters.

MAIN RELATED PRODUCTS:

POLIFIN Glossy finish anti-dirt, anti-wear for floors.

PRECAUTIONS:

- Do not use on wood or parquet.

NOTES:

Our recommendations are based on current research knowledge and aim to provide the best guidance to the buyer-user. However, such recommendations require preliminary tests and trials in the fields of application, on the types of materials present, and under various application conditions. The user independently decides on the suitability and field of use. MARBEC Srl assumes no responsibility for the misuse of its products. Rev8-Ver30082023

WARNINGS:



WARNING: DANGER

Hazard Statements: Causes serious eye damage. Causes skin irritation.

Precautionary Statements: IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and if easy to do. Continue rinsing. Wear protective gloves and eye/face protection. Immediately call a POISON CENTER/doctor/...

Contains: 2-PHENOXYETHANOL

Ingredients according to Regulation (EC) No 648/2004:

Anionic surfactants 5% < C < 15%, non-ionic surfactants < 5%.

UFI: 3520-K0S0-Q00X-6PD9

Rev8-Ver30082023

PACKAGING:

- 1 liter can – box of 6 pieces;
- 5 liter tin – box of 4 pieces.

YIELD:

Yield:

depending on the dirt to be removed and the cleaning technique:

- For vigorous washes: 1 liter / 4 – 8 sq. meters;
- For normal washes: 1 liter / 10 – 15 sq. meters.

TECHNICAL DATA:

- Physical state: Yellowish straw-colored liquid
- Specific gravity (g/cm³): 1.02
- pH: 11
- Flash point (ASTM): Non-flammable
- Solubility in water: Soluble in water.

STORAGE:

Store the product tightly closed and at a temperatures between 5°C and 30°C. Avoid prolonged exposure to sunlight. When stored under these conditions, the product has a shelf life of 5 years.

MARBEC SRL

Via Croce Rossa 51
51037 - Montale PT
Italia

CUSTOMER SERVICE

Tel +39 0573959848
Whatsapp +39 3348578502
Email contatti@marbec.it